
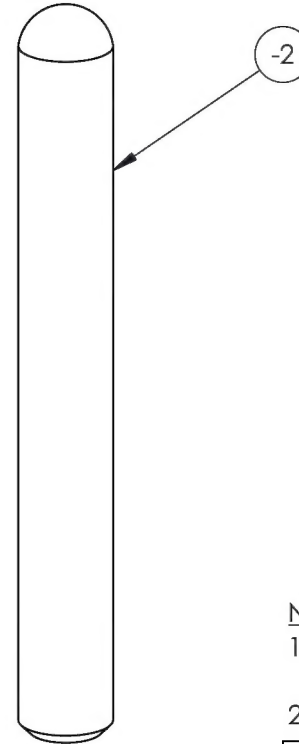


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		CH'D TITLEBLOCK & REVISION BLOCK, CH'D ENGRAVE NOTE.	6/9/2009	RJC	RW
1A		CH'D BLACK OXIDE TO BLACK ZINC.	9/8/2011	SE	RW
2	16-0124	-1 -2 ADDED FINISH SPEC BLACK ZINC ASTM B633 TYPE II SC 2. -1 CH'D MAT'L WAS C.F. HEX IS STEEL. -2 REMOVED NOTE 2.	8/18/2016	DEW	JAG

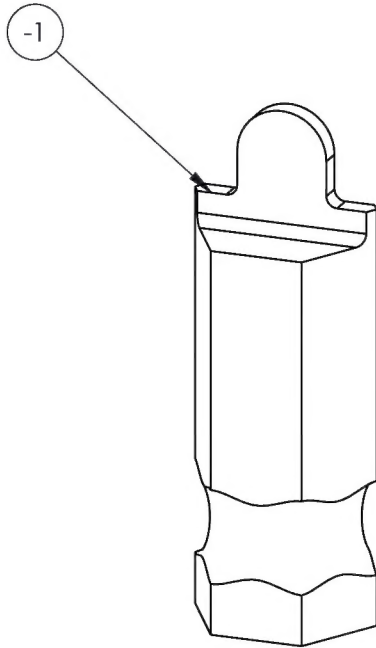

#### NOTES:




1. WRENCH FOR T/R BUSHING  
ALSO P/N RBA1600-80902
2. BAG & TAG W/ LABEL

<b>DART AEROSPACE</b>	
TITLE <b>T/R BUSHING WRENCH</b>	
DWG NO. <b>269T9319</b>	REV <b>2</b>
MAT'L HEAT TREAT FINISH SPEC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125°
DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: DUERFELDT	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	
SCALE <b>2:1</b>	DATE <b>6/24/2005</b>
SHEET 1 OF 3	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	WRENCH	STEEL	7/16 HEX DR. POWER #2 (DGI SUPPLY #482X) MODIFIED	
			-2	1	PIN	01		

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0124	-1 CH'D MAT'L WAS C.F. HEX IS STEEL. ADDED FINISH SPEC BLACK ZINC ASTM B633 TYPE II SC 2.	8/18/2016	DEW	JAG

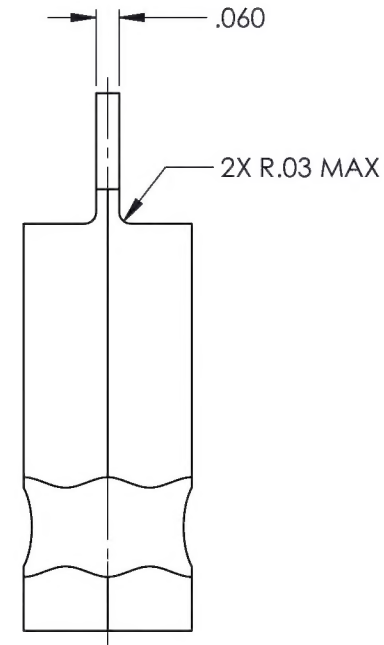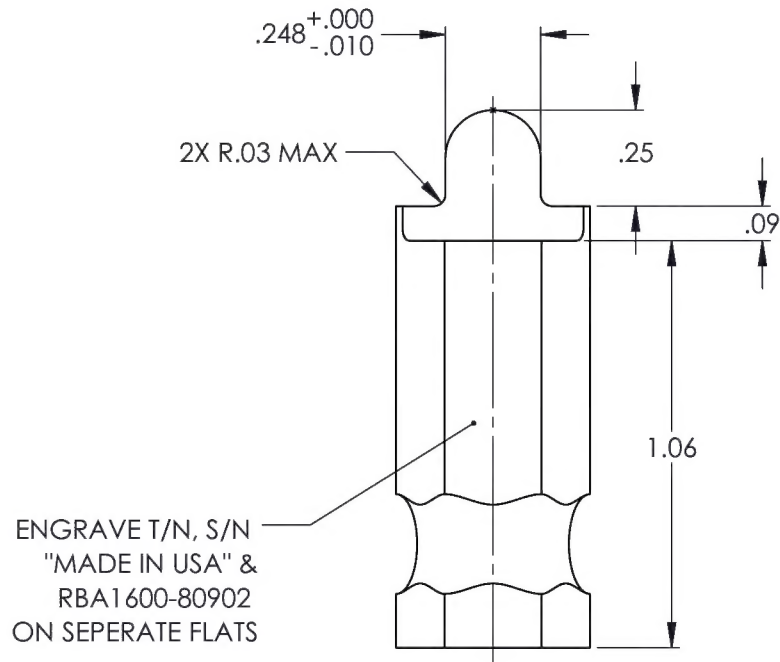


-1  
WRENCH

<b>DART AEROSPACE</b>																							
TITLE <b>T/R BUSHING WRENCH</b>																							
DWG NO. <b>269T9319-1</b>	REV <b>2</b>																						
<table border="1"> <tr> <td>MAT'L STEEL</td> <td>UNLESS OTHERWISE SPECIFIED</td> </tr> <tr> <td>HEAT TREAT</td> <td>DIMENSIONS ARE IN INCHES</td> </tr> <tr> <td>FINISH BLACK ZINC</td> <td>.XXX ± .005 FRACTIONS ± 1/8</td> </tr> <tr> <td>SPEC ASTM B633 TYPE II SC 2</td> <td>.XX ± .01 ANGLES ± 5°</td> </tr> <tr> <td></td> <td>.X ± .1 SURFACES = 125°</td> </tr> <tr> <td>DRAWN BY: PERRITT</td> <td>1. BREAK ALL SHARP EDGES</td> </tr> <tr> <td>CHECKED: DUERFELDT</td> <td>.015 x 45° OR .015R</td> </tr> <tr> <td>OPPS APPR: ANDERSON</td> <td>2. DIMENSIONAL LIMITS APPLY</td> </tr> <tr> <td>QA APPR: LINDSAY</td> <td>AFTER PLATING</td> </tr> <tr> <td>APPROVED: GILBERT</td> <td>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</td> </tr> <tr> <td></td> <td>USED ON MODEL</td> </tr> </table>		MAT'L STEEL	UNLESS OTHERWISE SPECIFIED	HEAT TREAT	DIMENSIONS ARE IN INCHES	FINISH BLACK ZINC	.XXX ± .005 FRACTIONS ± 1/8	SPEC ASTM B633 TYPE II SC 2	.XX ± .01 ANGLES ± 5°		.X ± .1 SURFACES = 125°	DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES	CHECKED: DUERFELDT	.015 x 45° OR .015R	OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY	QA APPR: LINDSAY	AFTER PLATING	APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009		USED ON MODEL
MAT'L STEEL	UNLESS OTHERWISE SPECIFIED																						
HEAT TREAT	DIMENSIONS ARE IN INCHES																						
FINISH BLACK ZINC	.XXX ± .005 FRACTIONS ± 1/8																						
SPEC ASTM B633 TYPE II SC 2	.XX ± .01 ANGLES ± 5°																						
	.X ± .1 SURFACES = 125°																						
DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES																						
CHECKED: DUERFELDT	.015 x 45° OR .015R																						
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY																						
QA APPR: LINDSAY	AFTER PLATING																						
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009																						
	USED ON MODEL																						
SCALE <b>2:1</b>	DATE <b>6/24/2005</b>																						
SHEET 2 OF 3																							

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0124	-2 ADDED FINISH SPEC BLACK ZINC ASTM B633 TYPE II SC 2.	8/18/2016	DEW	JAG

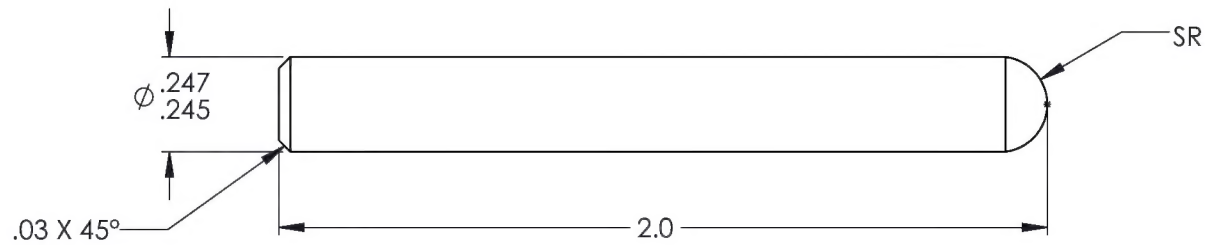

-2  
PIN

<b>DART</b> AEROSPACE	
TITLE <b>T/R BUSHING WRENCH</b>	
DWG NO. <b>269T9319-2</b>	REV <b>2</b>
MAT'L 01 HEAT TREAT FINISH BLACK ZINC SPEC ASTM B633 TYPE II SC 2	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125/✓ 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
DRAWN BY: PERRITT	USED ON MODEL
CHECKED: DUERFELDT	
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 2:1	DATE 6/24/2005
SHEET 3 OF 3	